
Family data sheet **MAGNET STRING**

LED pendant light, easy installation with click magnet, magnetic rail Accessories and converter to be ordered separately, max. Track length 20m or 450W per feed



CHARACTERISTIC

- Standard reflector 32° (on request also in 26° or 45° available)
- Standard length cable 1600mm
- Voltage 24V DC (order converter separately)

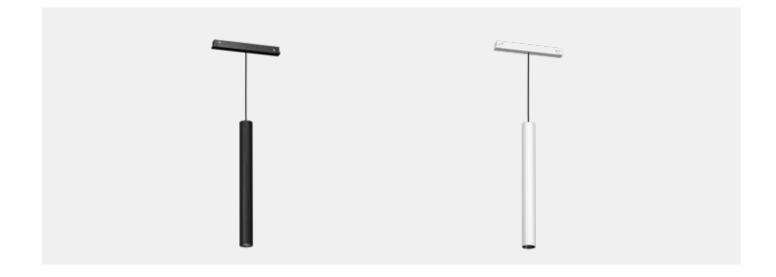



Product overview:




Technical information:

	2700K	
LED:	CREE LED	LED:
Total Watt:	8W	Total Watt:
Reflector:	32° (Standard)	Reflector:
Net lumen:	570lm	Net lumen:
Kelvin (CCT):	2700K	Kelvin (CCT):
CRI:	>90Ra	CRI:
Protection:	IP20	Protection:
Protection class:	3	Protection class
Life expectancy:	L70/B10 = 50.000h	Life expectancy
Voltage:	220~240V AC/ 48V DC	Voltage:
Dimmability:	DALI	Dimmability:
Converter:	excluding external converter	Converter:

	3000K	
LED:	CREE LED	
Total Watt:	8W	
Reflector:	32° (Standard)	
Net lumen:	613lm	
Kelvin (CCT):	3000K	
CRI:	>90Ra	
Protection:	IP20	
Protection class:	3	
Life expectancy:	L70/B10 = 50.000h	
Voltage:	220~240V AC/ 48V DC	
Dimmability:	DALI	
Converter:	excluding external converter	



Drawings:



item number	watt	0 kelvin	⊘ reflector	€ color	control
LW48-MS-0-0-6	8W	» 2700 « » 3000 «	<mark>» M</mark> « 32° (Standard)	» B « black/ black	DALI
		» 2700 «		» ₩ « white/ black	

