

## Product family

# BABA R6

Recessed lights with a neat and minimalist design, the extremely small edge and built-in optics make them an innovative and effective element, ideal for applications that range from lighting accents for exhibition elements or architectural details to general lighting, excluding converters (not dimmable or dimmable via PUSH / 1-10V / DALI) must be ordered separately



### ADVANTAGES

- small edge and built-in optics
- excl. converter (not dimmable or dimmable via PUSH / 1-10V / DALI must be ordered separately)

### CHARACTERISTIC


- Fixed recessed downlight
- 3 selectable housing colors
- Degree of protection IP44
- LED beam angle standard 40 °
- Other light colors and beam angles on request.

## Product overview:

### Types:



BABA R6

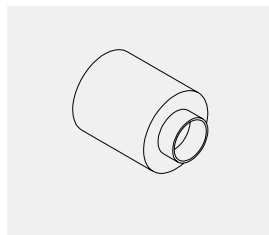

Cast-in housing for BABA  
(optional)

### Light emission:



direct


### Housing color:



grey




black



white

### Angle:

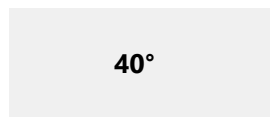

40°

Standard



20°

(on request)


### Light color:



2700K superwarm white



3000K warm white



4200K neutral white  
(on request)



6000K cold white  
(on request)



blue (on request)




green (on request)



red (on request)

## Drawings:

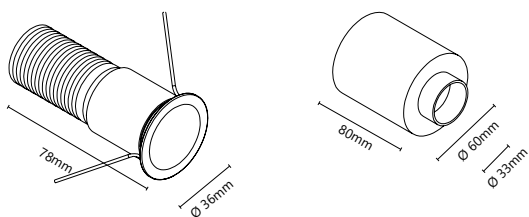

Cut-Out  $\varnothing$  30mm  
Installation depth 78mm

## Article overview:

item number	type	① angle	② kelvin	③ color
FL-BW1 ① ② ③	BABA R6 LED 3W 350mA oder 6W 500mA	» 2 « 40°	» 0 « 2700K  » 1 « 3000K	» G « grey  » N « black  » W « white
FL-CS1006	Casting housing BABA R6			

## Technical information:

### BABA R6

<b>Total watt:</b>	3W 6W
<b>Net lumen:</b>	267lm (3W)    279lm (3W) 384lm (6W)    400lm (6W)
<b>Kelvin (CCT):</b>	2700K    3000K
<b>Angle:</b>	40° Standard
<b>CRI:</b>	>85Ra
<b>Light emission:</b>	direct
<b>Protection:</b>	IP44
<b>Life expectancy:</b>	50.000h
<b>Voltage:</b>	100~230V AC/ 350mA DC (3W) 100~230V AC/ 500mA DC (6W)