

Product family

WALLY LINE

Reflectors from the WALLWASHER series with Bartenbach technology have an asymmetrical radiation characteristics with complex surface microfacet technology, the perfect wall lighting starts directly from the ceiling edge and guarantees an absolutely even surface illumination, housing off powder-coated aluminum for tool-free installation in the ceiling, LED circuit board can be changed (screwed), tunable white lighting solutions on request, converters must be ordered separately



WALLY LINE 01



WALLY LINE 02

CHARACTERISTIC

- ① WALLY series is available in 2 versions
- ① Light color: 2700K, 3000K or 4000K
- ① equipped with HIGH-Power LED
- ① asymmetric wallwasher 2x45° (longitudinal) and 85° (lateral)
- ① Housing: black RAL9005, silver grey RAL9006, white RAL9016 or special color on request
- ① Degree of protection: IP20
- ① TW Tunable White on request
- ① excl. external converter (on request dimmable)r

WALLY LINE

Watt Total:	17W		
Kelvin (CCT):	2700K	3000K	4000K
Net lumen:	1450lm	1530lm	1660lm
Efficiency:	82%		
CRI:	>90Ra		
Angle:	2x30°, 2x50°		
Life expectancy:	50.000h, L80B20, ta=25°C		
Voltage:	100 ~ 230V AC/600mA		
Others:	LED		

Product overview:

Types:



WALLY LINE 01



WALLY LINE 02

Reflector:

2x 45°/85°


Light colors:



2700K superwarm white



3000K warm white




4000K neutral white


Housing colors:



black RAL9005

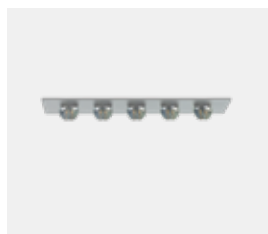

silver grey RAL9006

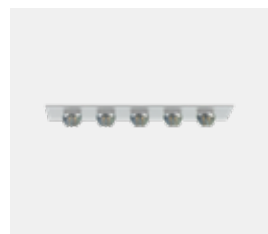


white RAL9016

Article overview:

item number	types	LED/ type	watt	reflector	① kelvin	② housing
LW-WW-L1-①-②	WALLY LINE 01	5x LED	17W	Wallwasher 2x 45°/85°	» SW « 2700K	» B « ● RAL 9005
LW-WW-L2-①-②	WALLY LINE 02	5x LED with cover			» WW « 3000K	» S « ● RAL 9006
					» NW « 4000K	» W « ○ RAL 9016


Drawings:

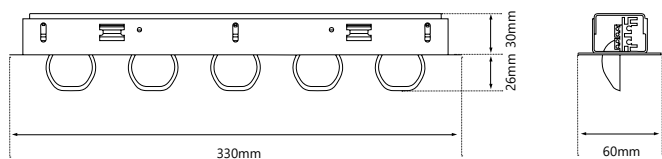

WALLY LINE 01

Cutout & installation depth:
WALLY LINE 01

310 x 50 x 40mm

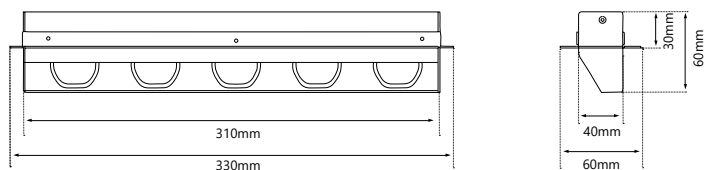


WALLY LINE 02

Cutout & installation depth:
WALLY LINE 02

310 x 50 x 40mm

Light distribution:

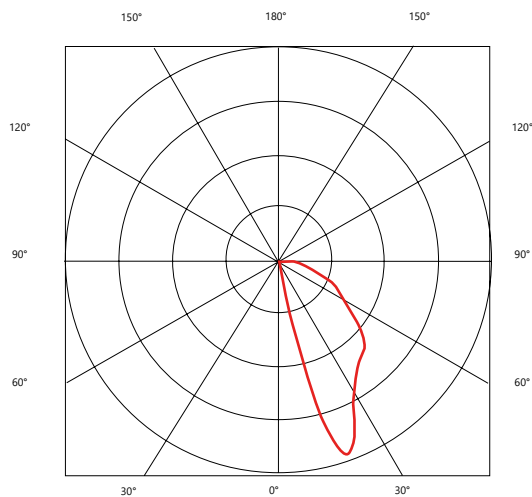

Wallwasher