

Product family

WALLY

Reflectors from the WALLWASHER series with Bartenbach technology have an asymmetrical radiation characteristics with complex surface microfacet technology, the perfect wall lighting starts directly from the ceiling edge and guarantees an absolutely even surface illumination, housing off powder-coated aluminum for tool-free installation in the ceiling, LED circuit board can be changed (screwed), tunable white lighting solutions on request, converters must be ordered separately



WALLY SQUARE 1



WALLY ROUND 1








WALLY SQUARE 1 ANGLE

CHARACTERISTIC

- WALLY series is available in 3 versions
- Light color: 2700K, 3000K or 4000K
- equipped with HIGH-Power LED
- asymmetric wallwasher 2x45° (longitudinal) and 85° (lateral)
- Housing: black RAL9005, silver grey RAL9006, white RAL9016 or special color on request
- Degree of protection: IP20
- TW Tunable White on request
- excl. external converter (on request dimmable)

WALLY

Watt Total:	6W		
Kelvin (CCT):	2700K	3000K	4000K
Net lumen:	510lm	540lm	590lm
Efficiency:	82%		
CRI:	> 90Ra		
Angle:	2x30°, 2x50°		
Life expectancy:	50.000h, L80B20, ta=25°C		
Voltage:	100 ~ 230V AC/500mA		
Others:	    		

Product overview:

Types:



WALLY SQUARE 1



WALLY ROUND 1



WALLY SQUARE 1 ANGLE

Reflector:

2x 45°/85°


Light colors:



2700K superwarm white



3000K warm white



4000K neutral white


Housing colors:



black RAL9005



silver grey RAL9006




white RAL9016


Article overview:

item number	types	watt	reflector	① kelvin	② housing
LW-WW-Q1-①-②	WALLY SQUARE 1	6W	Wallwasher 2x 45°/85°	» SW « 2700K	» B « ● RAL 9005
LW-WW-S1-①-②	WALLY ROUND 1			» WW « 3000K	» S « ● RAL 9006
LW-WW-Q01-①-②-A	WALLY SQUARE 1 ANGLE			» NW « 4000K	» W « ○ RAL 9016


Drawings:




WALLY SQUARE 1




WALLY ROUND 1



Cutout & installation depth:
WALLY SQUARE/ ROUND
 Ø 73 x 45mm




WALLY SQUARE 1 ANGLE



Cutout & installation depth:
WALLY SQUARE 1 ANGLE
 85 x 85 x 50mm

Light distribution:

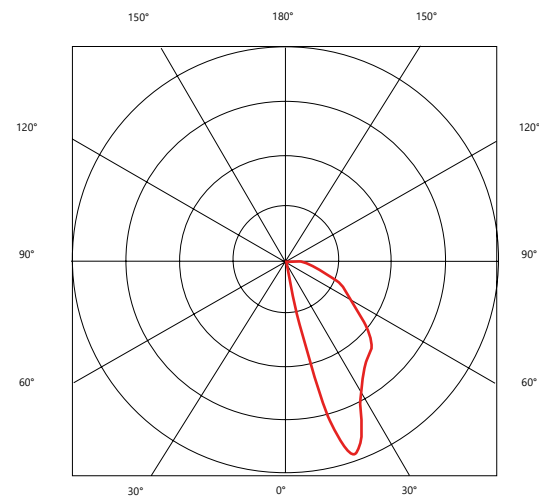

Wallwasher

The technical data are rated values for an ambient temperature of 25°C. Luminous flux and power depending on the available selection +/- 10% and tolerance of the color temperature +/- 150 Kelvin. Misprints and errors are reserved. Drawings and images have the character of sketches. Length specifications without units in millimeters. Object photos represent sample applications regardless of the actual effect. We reserve the right to make changes to the program, technology and design (without notice). Color deviations are due to the printing process and are possible. Our general terms and conditions apply.