

Product family

TUBE MINI

LED track spotlight for 3ph. track, equipped with first-class LED board, rotatable and swiveling, CRI > 90Ra, in connection with our 3ph. busbars 230V / surface or recessed mounting, reflectors (30°), protection class: IP20, including converter, available in light color: 3000K, dimmable phase and phase section, housing colors: black/black, aluminum gray/black or white/black




ADVANTAGES

- in connection with 3ph. track, surface mounting or built-in installation (order separately)
- dimmable leading and trailing edge

CHARACTERISTIC

- 355 ° swivel and 90 ° swivel
- housing colors black / black, aluminum gray / black or white / black
- degree of protection IP20
- LED beam angle 30 ° (standard)

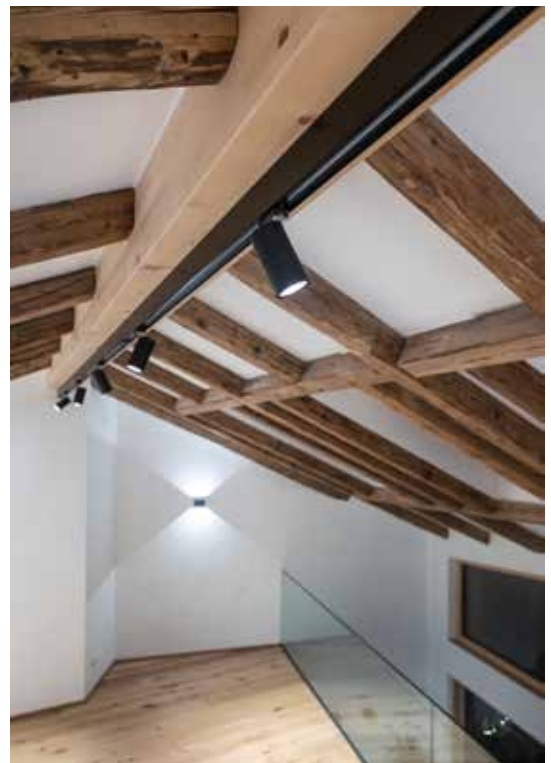


Product overview:


Housing color:



black / black

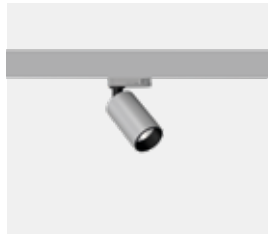

silver / black

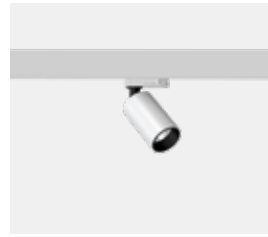


white / black

Light emission:




direct

Reflector:



30° (Standard)

Light color:




3000K warm white

Control:



leading and trailing edge

Drawings:

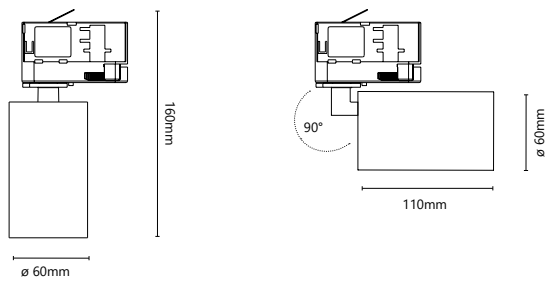

Technical information:

Total watt:	8W
Net lumen:	446lm
Kelvin (CCT):	3000K
Protection:	IP20
Beam Angle:	30° (Standard)
CRI:	>90Ra
Life expectancy:	50.000 Hours
Voltage:	100~240V AC/ 230V DC

item number	watt	① kelvin	② reflector	③ color	④ dimmable
LW-AFTM-①-②-③-④	8W	» 3000 «	» 30 « 30° (Standard)	» B « black / black » S « silver / black » W « white / black	dimmable leading and trailing edge